

Front USB interface cover panel

 **WARNING**


Before repairing any electrical parts, starting switch power mode must be set to OFF state, and all electrical loads must be OFF, unless otherwise specified in the operation procedure. If any tool or equipment is easy to contact any exposed live electrical terminal, disconnect the negative battery cable, too. Any violation of these safety instructions may result in personal injuries or damages to the vehicle and its components.

 **NOTE**


- There might be some differences on illustrations of this program, and you are advised to the vehicle configuration, but the basic information is always correct.
- There might be some parts that are not displayed on the illustration. That will help display the main parts more clearly.

Removal

1. Disconnect console moulding switch panel assembly-front. See:[Console moulding switch panel assembly-front](#)
2. Disconnect the harness connector of front USB interface cover panel.

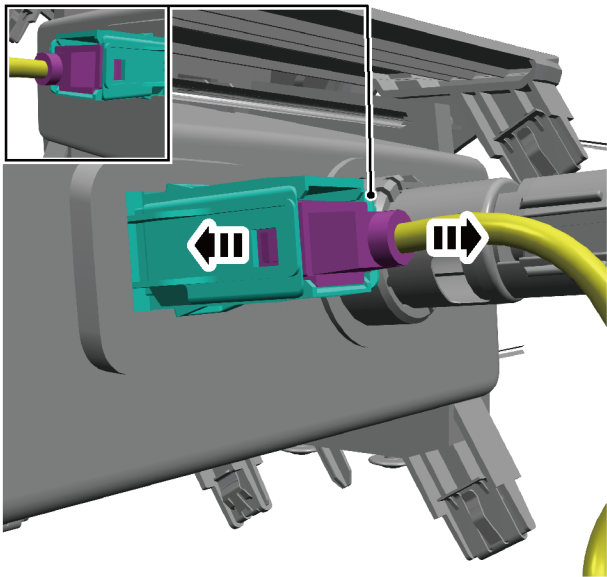

3. Press two mounting clips of front USB interface cover panel, remove front USB interface cover panel.

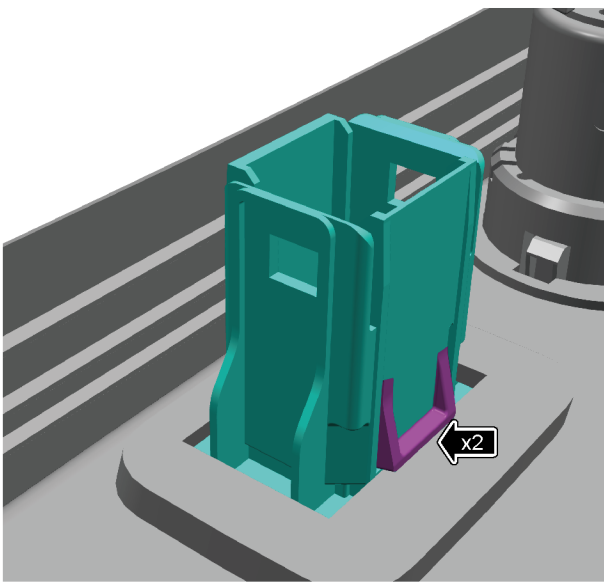

Installation

1. Install front USB interface cover panel
2. Connect the harness connector of front USB interface cover panel.
3. Install the console moulding switch panel assembly-front. See:[Console moulding switch panel assembly-front](#)